




Rhino-Rack 2500 Series

CONTROLLED

**Instruction for
DK487 and RS738**

		FRONT							REAR					
		Crossbar Identification							Crossbar Identification					
Vehicle	Date	Crossbar	Front Right Pad/Clamp	Front Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction	Rear Right Pad/Clamp	Rear Left Pad/Clamp	Measurement strip length per side	Measurement strip length per side	Measurement Distance (x)	Foot plate arrow direction
HOLDEN Astra BK 5dr Hatch, VAUXHALL, OPEL Astra K 5dr Hatch	16-	1260mm	M435 SUB0692	M436 SUB0692	179mm	66mm	1006mm / 39,5/8"	OUT	M368 SUB0612	M368 SUB0612	151mm	38mm	950mm / 37,13/32"	OUT
			Pad Arrow Forward						Pad Arrow Out					

Table above refers to Direction of Pad Arrow and Foot Plate Arrow when fitted on the vehicle.

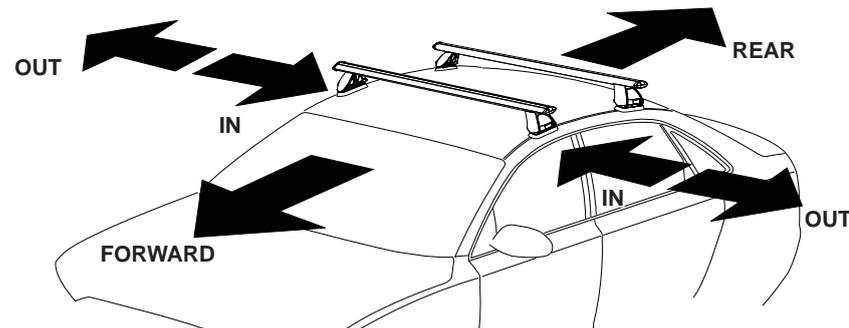





Rhino-Rack 2500 Series

CONTROLLED

Measurement A: CENTRE of door jamb to CENTRE arrow of leg foot plate.

Measurement B: CENTRE of Front leg foot plate arrow to CENTRE of Rear leg foot plate arrow.

Carrying capacity: Roof rack is rated up to 75kg. Please refer to manufacturers handbook for your vehicles maximum roof load capacity. Always use the lower of the two figures.

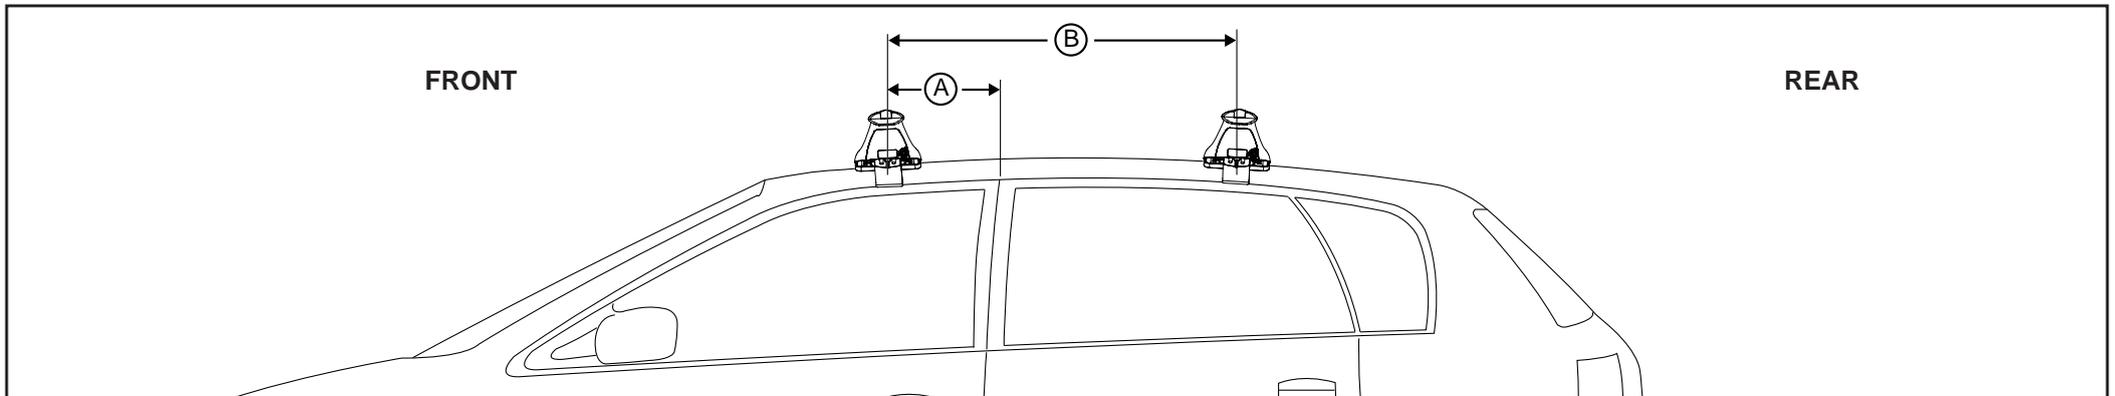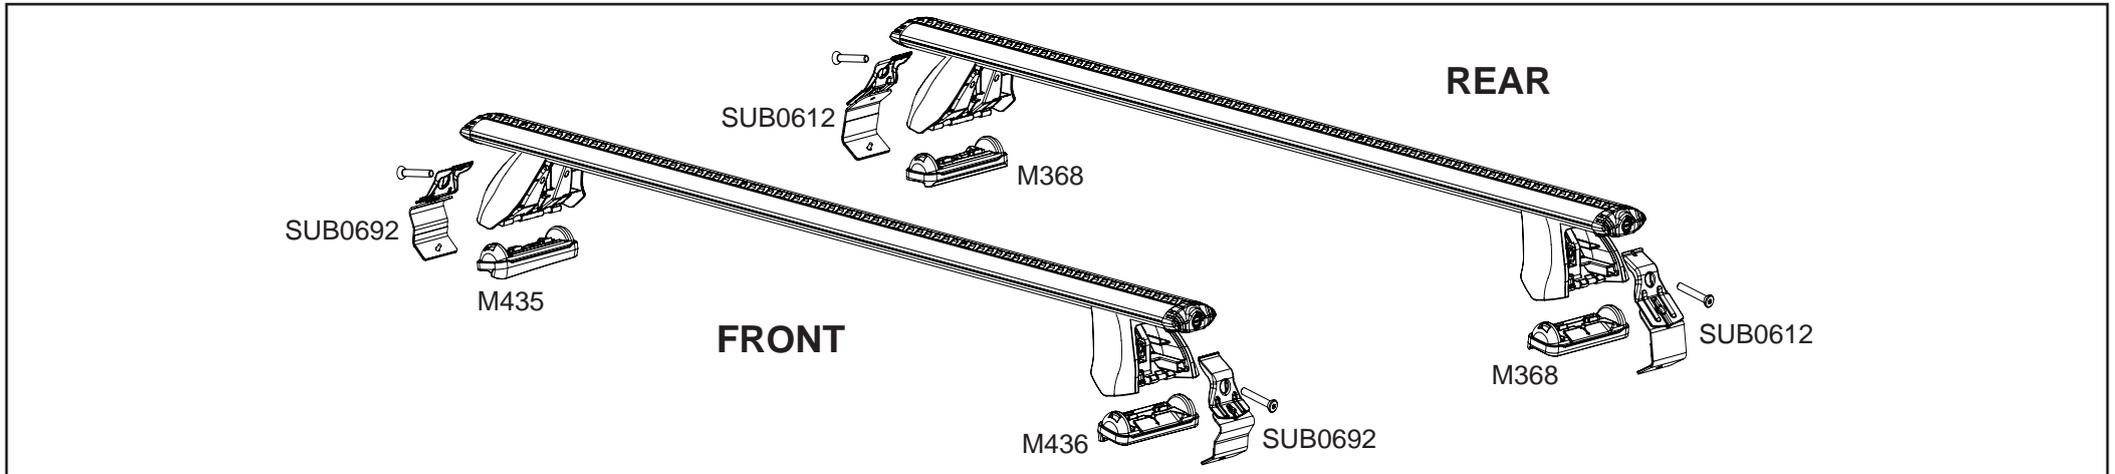

VEHICLE	Date	Measurement A	Measurement B	Load Rating up to (includes racks 5kg/ 11lbs)
HOLDEN Astra BK 5dr Hatch VAUXHALL, OPEL Astra K 5dr Hatch	16-	290mm / 11,7/16"	705mm / 27,3/4"	75kg / 165lbs